




# IGX F1 RESET

Uw = 0,79 W/m²K


GLAZING UNIT

Ug = 0,5 W/m²K

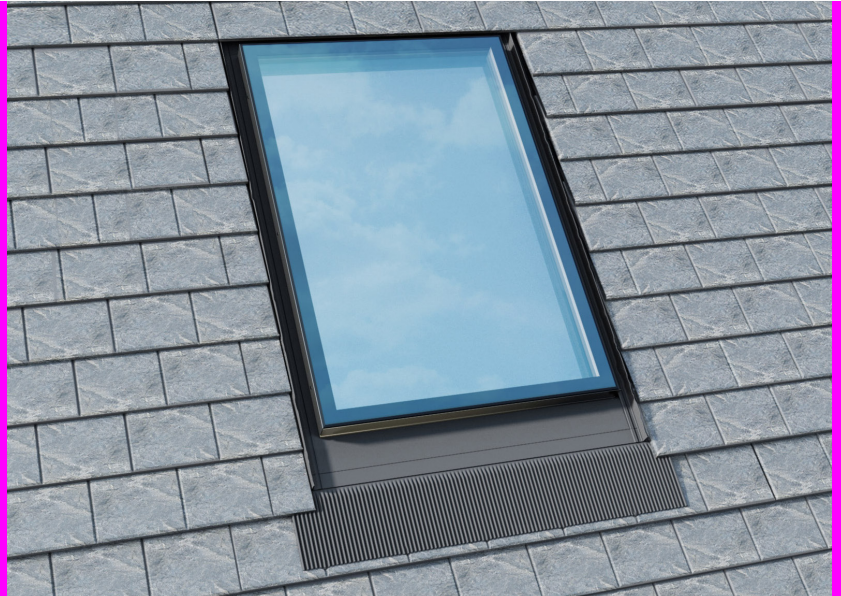


**10** years  
\*\*  
GUARANTEE  
FOR WINDOWS

**5** years  
\*\*  
GUARANTEE  
FOR GLASS

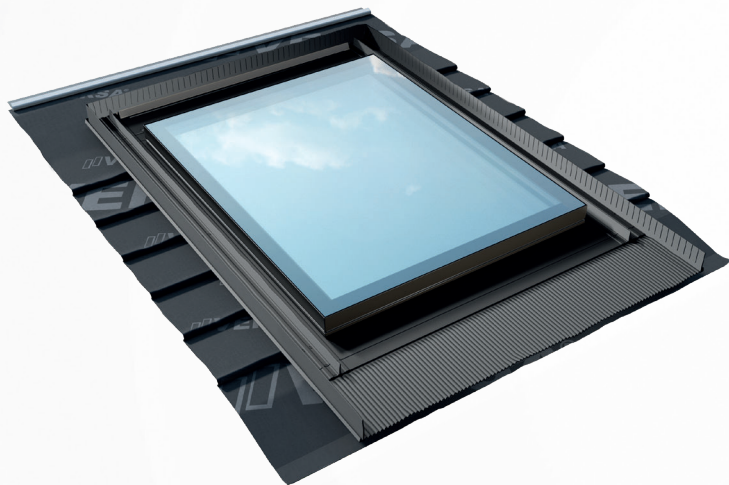

### GLAZING

- 4-Glazed unit
- Gas - argon
- 2x warm spacer
- 2x low emission coat
- Laminated inner pane with foils for safety (class P2A)
- 6 mm toughened outer pane for strength



6H/18/4TH/20/44.2T

### PROFILE TYPE

Multi-chamber pvc profile in white colour, resistant to influence of atmospheric factors, filled with polyurethane foam




Roof pitch 5°-90°



The IGX F1 RESET consists of the following:

- Fixed 4- glazed window,
- Integrated rubber flashing RESET,
- Integrated fitted permeable under felt.

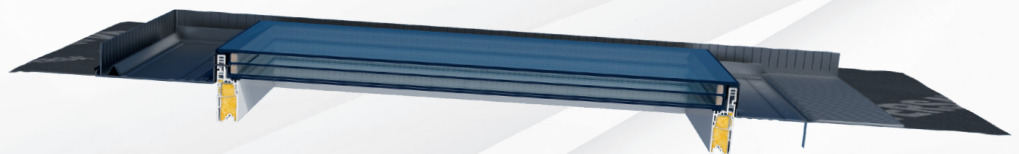


**15 min**  
THE QUICKEST  
INSTALLATION



**FOR MOST  
ROOF COVERINGS**



**5°-90°  
ROOF PITCH\***



**KOMBI  
GRATIS!**



**HIGHEST  
RESISTANCE**

The flashing is resistant to:  
- stretching  
- mechanical damage  
- weather conditions (UV radiation)

Window sizes:

glazing area [m²]	0.63
window size: width x height [cm]	78x98
IGX F1	✓

\* For the reference sample according to norm EN ISO 10077-2 / EN ISO 10211)  
\*\* Details in the warranty card available at [www.okpol.pl](http://www.okpol.pl) and at points of sale.