



PGX A1 LED

NON-OPENING




Uw = 0,99 W/m²K

GLAZING UNIT

Ug = 1,0 W/m²K


10 years
*
GUARANTEE
FOR WINDOWS

5 years
*
GUARANTEE
FOR WINDOWS

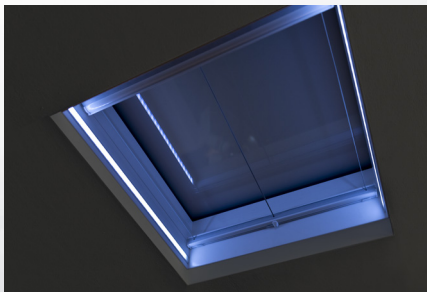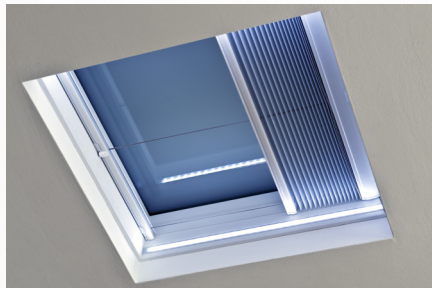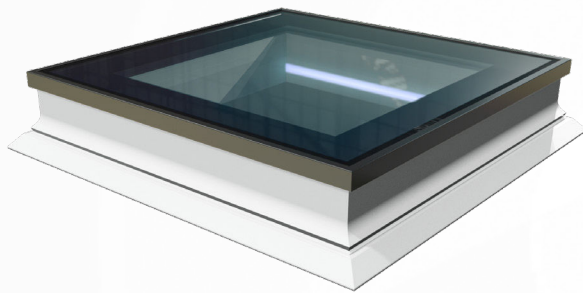

GLAZING

single chamber glazing unit
noble gas - argon
warm spacer
low emission coat
outer toughened pane
laminated inner pane



6H/16/44.2T

PROFILE TYPE

multi-chamber pvc profile in white colour,
resistant to influence of atmospheric factors,
filled with polyurethane foam

outside covering in RAL 7022



ROOF PITCH 2°-15°



The tape is remotely controlled - you can set the light intensity, the colour of the light and some extra effects such as blinking and pulsing. The colour choice is absolutely limitless - you can pick one of the millions RGB combinations. Seven basic shades are presented on the remote control.



Standard dimensions:

size symbol	01P	02P	12P	03P	04P	05P	06P	07P	08P	09P	10P	11P
width x height [cm]	60×60	90×60	120×60	70×70	80×80	90×90	120×90	100×100	150×100	120×120	140×140	220×120
PGX A1 LED	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓

*Details about the guarantee policy available at www.okpol.com